

TSS Product Specification

BSxxxxM Thyristor Surge Suppressor



1、FEATURES

- Excellent capability of absorbing transient surge
- Quick response to surge voltage
- Eliminates overvoltage caused by fast rising transients
- Non degenerative



2、PART NUMBER AND ELECTRICAL PARAMETER @ T=25°C RH = 45%-75%

Part Number	V _{DRM}	I _{DRM}	V _s	I _s	V _T	I _T	I _H	C _o
	V	μA	V	mA	V	A	mA	pF
		MAX	MAX		MAX		MIN	MAX
BS0060M	6	5	25	800	4	2.2	50	50
BS0300M	25	5	40	800	4	2.2	50	50
BS0640M	58	5	77	800	4	2.2	150	50
BS0800M	75	5	98	800	4	2.2	150	50
BS1800M	160	5	220	800	4	2.2	150	50
BS2300M	190	5	260	800	4	2.2	150	50
BS2600M	220	5	300	800	4	2.2	150	45
BS3100M	275	5	350	800	4	2.2	150	45
BS3500M	340	5	490	800	4	2.2	100	10
BS4200M	390	5	500	800	4	2.2	100	10


- ①、V_s is measured at 100KV/S
- ②、Off-state capacitance is measured in V_{DC}=2V, V_{RMS}=1V, F=1MHz
- ③、All measurements are made at an ambient temperature of 25°C
- ④、Rating Surge Voltage: 2KV(10/700μS)

3、PART NUMBERING SYSTEM

BS XXXX M
 (1) (2) (3)

- (1) Bencent Semiconductor Surge Arrester
- (2) Series: 0060, 0300, 0640, 0800, 1800, 2300, 2600, 3100, 3500, 4200 etc.
- (3) Package : SMA

4、DIMENSIONS AND MARKING



Size	A (mm)	B (mm)	C (mm)	D (mm)
SMA	1.29--1.70	2.18--2.79	4.06—4.57	1.70—2.31
Size	E (mm)	F (mm)	G (mm)	H (mm)
SMA	0.15—0.31	0.89—1.50	0.10.—0.20	4.70—5.31

MARKING:



B35MA Part Number
 0909 Production Date
 0909 means 9th month,2009

TSS Product Specification


BSxxxxM Thyristor Surge Suppressor



5. RECOMMENDED SOLDERING PAD AND REFLOW PROFILE

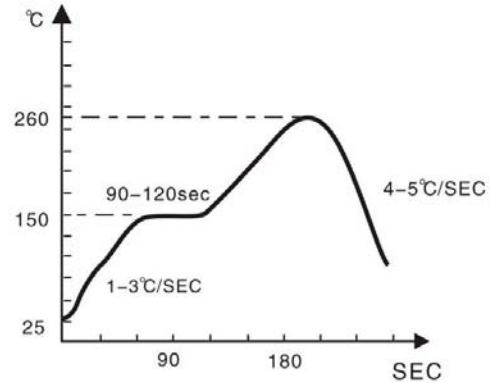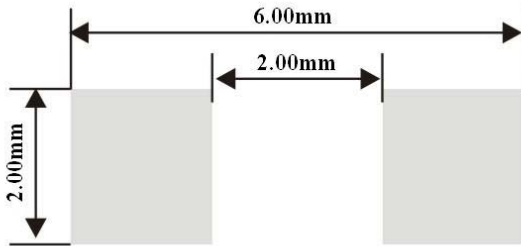

6. PACKAGE REEL INFORMATION

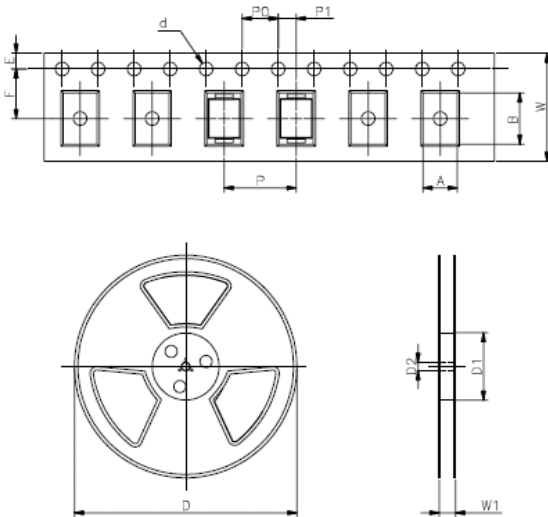

SMA (DO-214AC)

REF.	mm(inch)
A	2.6+/-0.15(.102+/-0.006)
B	5.15+/-0.15(.203+/-0.006)
d	1.5+/-0.1(.059+/-0.004)
D	330.0(13.0)
D1	50Min
D2	13+/-0.15(.512+/-0.020)
E	1.5+/-0.1(.059+/-0.004)
F	5.65+/-0.05(.222+/-0.002)
P	4.0+/-0.1(.157+/-0.004)
P0	4.0+/-0.1(.157+/-0.004)
P1	2.0+/-0.1(.079+/-0.004)
W	12.0+/-0.2(.472+/-0.008)
W1	16.8+/-2.0(.661+/-0.079)

OUTLINE	REEL (PCS)	PER CARTON (PCS)	REEL DIAMETERS (mm)	CARTON SIZE(mm)		
				L	W	H
TAPING	5,000	40,000	330	360	360	360

Remark:

- 1、 Company name change form *Bencent Electronics Limited* to *Shenzhen Bencent Electronics CO., Ltd*

Special Notes

- 1、 Shenzhen Bencent Electronics CO., Ltd (BENCENT) reserves the right to make changes without further notice to its products herein.
- 2、 BENCENT does not assumes any liability arising out of the application or usage of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.
- 3、 Any special usage must be authorized by BENCENT in advance; otherwise BENCENT does not take any liability of it.

Date Issued:2010/03